


## PD11-KNXs-DX V.7.0

### KNX Deluxe


## Specification

<b>SUPPLY VOLTAGE</b>	24 V DC from KNX-BUS network
<b>POWER CONSUMPTION</b>	12 mA
<b>MATERIAL ENCLOSURE</b>	Polycarbonate, UV-resistant
<b>TEMPERATURE RANGE</b>	-5°C...+45°C
<b>INGRESS PROTECTION</b>	IP54
<b>SETTINGS</b>	ETS 5 Software
<b>LIGHT VALUES</b>	5 - 2000 Lux
<b>EXTENSION OF THE DETECTION AREA</b>	with detector in slave mode
<b>AREA OF COVERAGE</b>	circular 360°
<b>RANGE OF COVERAGE</b>	Ø H 2.50m / T = 18°C: seated 3m tangential 9m radial 6m
<b>MOUNTING HEIGHT MIN./MAX./RECOMMENDED</b>	2m/5m/2.5m
<b>RECOMMENDED HEIGHT FOR MOUNTING</b>	2,5m
<b>LIGHT MEASUREMENT</b>	Mixed light, daylight + artificial light

## Measurements

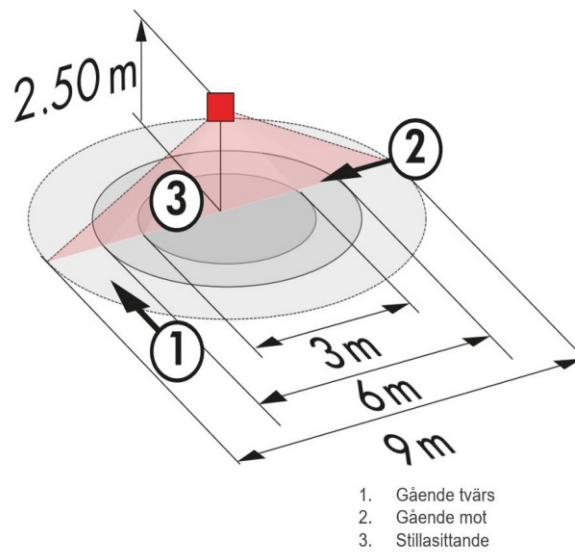

## Wiring

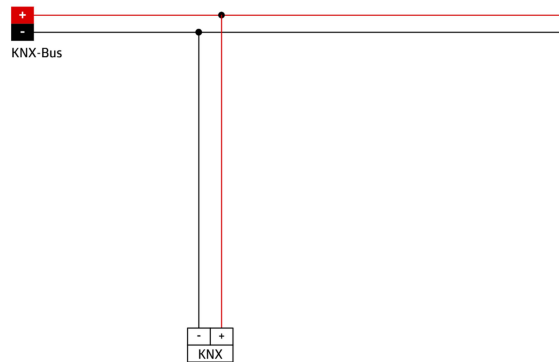

## Variants

E-NUMBER	ARTICLE NO.	DESCRIPTION	MOUNTING	INGRESS PROTECTION	COLOUR	PCS/PACK
1740175	93523	PD11-KNXs-DX-TAK	TAK False ceiling	IP54	White	1
1739250	92123	IR-PD-KNX	-	-	-	1
1301369	93067	BLE-IR-ADAPTER	-	-	-	1