


## PD11-KNXs-ST V.7.0

KNX Standard


### Specification

SUPPLY VOLTAGE	24 V DC from KNX-BUS network
POWER CONSUMPTION	12 mA
MATERIAL ENCLOSURE	Polycarbonate, UV-resistant
INGRESS PROTECTION	IP54
SETTINGS	ETS 5 Software
LIGHT VALUES	5 - 2000 Lux
EXTENSION OF THE DETECTION AREA	with detector in slave mode
AREA OF COVERAGE	circular 360°
RANGE OF COVERAGE	Ø H 2.50m / T = 18°C: seated 3m tangential 9m radial 6m
MOUNTING HEIGHT MIN/MAX/RECOMMENDED	2m/5m/2.5m
RECOMMENDED HEIGHT FOR MOUNTING	2,5m
LIGHT MEASUREMENT	Mixed light, daylight + artificial light

## Measurements

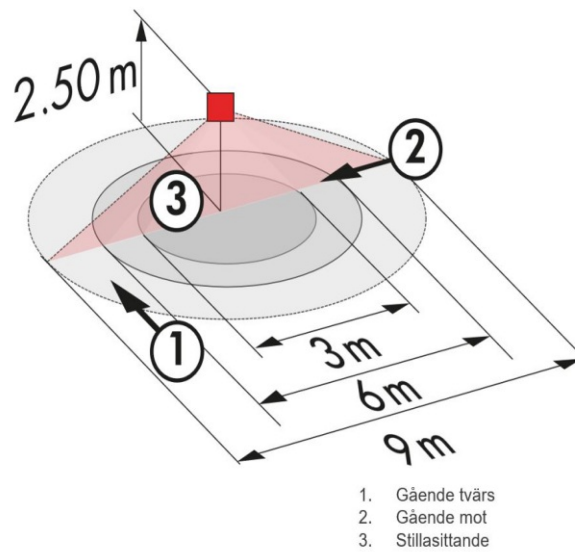

## Wiring

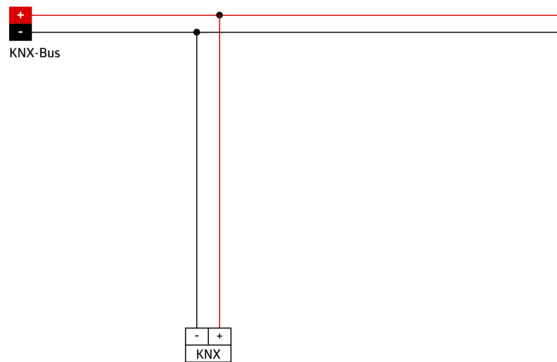

## Variants

E-NUMBER	ARTICLE NO.	DESCRIPTION	MOUNTING	INGRESS PROTECTION	COLOUR	PCS/PACK
1740174	93522	PD11-KNXs-ST-TAK	TAK False ceiling	IP54	White	1
1739250	92123	IR-PD-KNX	-	-	-	1
1301369	93067	BLE-IR-ADAPTER	-	-	-	1