


## PD4N-KNXs-GH-DX V.7.0

### KNX Deluxe


## Specification

SUPPLY VOLTAGE	24 V DC from KNX-BUS network
POWER CONSUMPTION	12 mA
MATERIAL ENCLOSURE	Polycarbonate, UV-resistant
INGRESS PROTECTION	IP54
SETTINGS	ETS 5 Software
LIGHT VALUES	5 - 2000 Lux
EXTENSION OF THE DETECTION AREA	with detector in slave mode
AREA OF COVERAGE	circular 360°
RANGE OF COVERAGE	H 14m / T = 18°C: tangential r 22m / Ø 44m tangential r19m / Ø 30m
MOUNTING HEIGHT MIN./MAX./RECOMMENDED	5m/16m/14m
RECOMMENDED HEIGHT FOR MOUNTING	up to 14m
LIGHT MEASUREMENT	Mixed light, daylight + artificial light

## Measurements

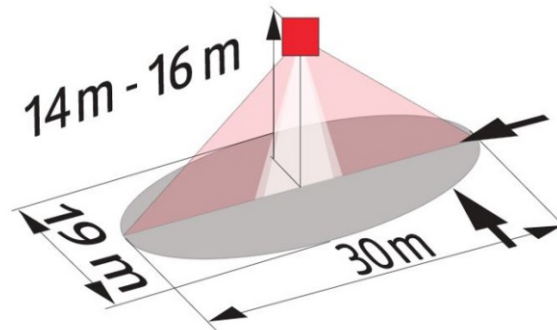

## Wiring

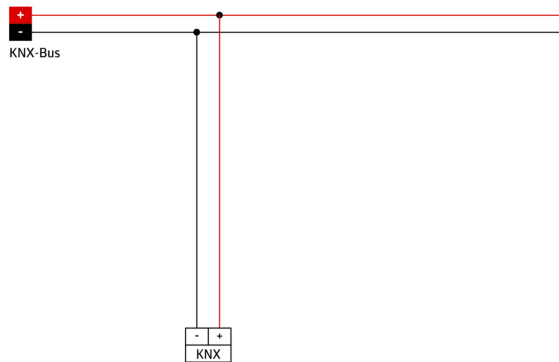

## Variants

E-NUMBER	ARTICLE NO.	DESCRIPTION	MOUNTING	INGRESS PROTECTION	COLOUR	PCS/PACK
1740171	93518	PD4N-KNXs-GH-DX-UTP	UTP Surface	IP54	White	1
1739250	92123	IR-PD-KNX	-	-	-	1
1301369	93067	BLE-IR-ADAPTER	-	-	-	1
1313683	92199	Wire basket BSK (Ø200 x H90 mm)	-	-	White	1

