


## PD9-KNXs-GH-DX V.7.0

### KNX Deluxe


## Specification

SUPPLY VOLTAGE	24 V DC from KNX-BUS network
POWER CONSUMPTION	12 mA
MATERIAL ENCLOSURE	Polycarbonate, UV-resistant
TEMPERATURE RANGE	-5°C...+45°C
INGRESS PROTECTION	IP20
SETTINGS	ETS 5 Software
LIGHT VALUES	5 - 2000 Lux
EXTENSION OF THE DETECTION AREA	with detector in slave mode
AREA OF COVERAGE	circular 360°
RANGE OF COVERAGE	Ø H 9m / T = 18°C: tangential 5,4m Ø H 6m / T = 18°C: tangential 3,5m
MOUNTING HEIGHT MIN/MAX/RECOMMENDED	5m/10m/6m
RECOMMENDED HEIGHT FOR MOUNTING	6m
LIGHT MEASUREMENT	Mixed light, daylight + artificial light

## Measurements

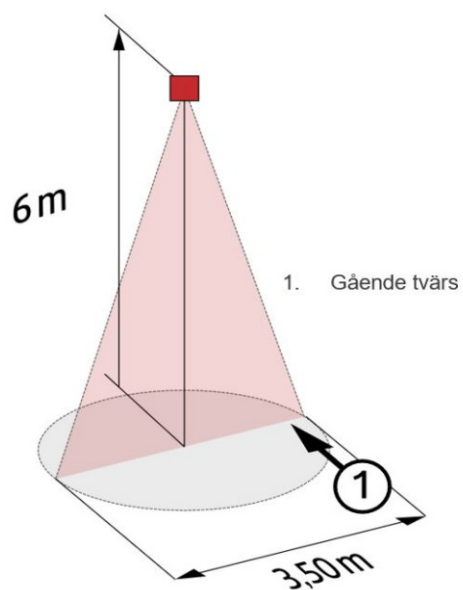

## Wiring

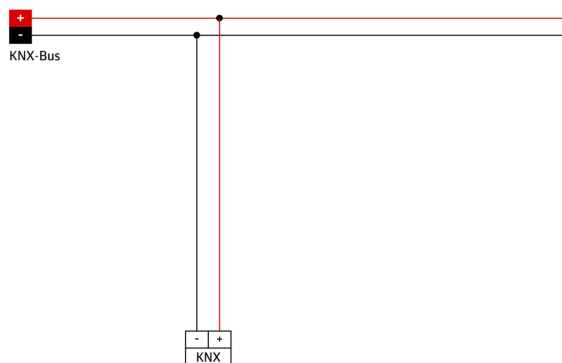

## Variants

E-NUMBER	ARTICLE NO.	DESCRIPTION	MOUNTING	INGRESS PROTECTION	COLOUR	PCS/PACK
1740173	93521	PD9-KNXs-GH-DX-TAK	TAK False ceiling	IP20	White	1
1739250	92123	IR-PD-KNX	-	-	-	1
1301369	93067	BLE-IR-ADAPTER	-	-	-	1